



## CONCENTRATE FOR ACRYLIC RESINS

TUBALL™ MATRIX 302 is a concentrate based on TUBALL™ single wall carbon nanotubes specifically designed to provide superior electrical conductivity to **water-based acrylic systems** while retaining mechanical properties and minimally impacting the host matrix. TUBALL™ MATRIX 302 is available in black color flakes with a pasty texture form and may contain white inclusions.

TUBALL™ is a unique single wall carbon nanotube additive from OCSiAl that provides electrical conductivity at ultra-low dosage with minimal impact on the rheological and mechanical properties of the host matrix.

### Applications

- Electrostatic dissipative paints;
- Electrostatic discharge control materials applied by coil coating;
- Conductive primers;
- Other applications where electrical conductivity is required.

### Benefits

- TUBALL™ MATRIX only requires an ultra-low dosage starting from just 0.1 wt.%;
- Allows production of conductive parts that retain bright colours;
- Maintains or even increases mechanical strength;
- Ensures permanent and uniform electrical conductivity without “hot spots”;
- Without a significant increase in viscosity or density of the host material.

### Properties


Concentrate carrier		Solution of alkylene glycol derivative and distyryl biphenyl derivative	
Property	Test method	Value	
Boiling point	No data available	188°C	
Flash point	ASTM D3278	107 °C	
Density at 25°C	ISO 15212-1	1.056 g/ml	

TUBALL™ MATRIX 302 may contain metal particles up to 500 µm in size; the mass concentration of such inclusions does not exceed 0.04%.

### Typical addition rate

Depending on the characteristics of the dilution polymer and the processing conditions, the loading range of TUBALL™ MATRIX 302 for anti-static or dissipative applications can be as low as 0.1–4.0 wt.% calculated based on non-volatile matter. The exact loading level depends on the required performance, resin characteristics, processing conditions and presence of other ingredients.

An example of a percolation curve, obtained by compounding TUBALL™ MATRIX 302 in Euro Power 7 water-based acrylic paint, is shown in the figure below. The dilution of the concentrate in Euro Power 7 was performed using a mechanical overhead stirrer.

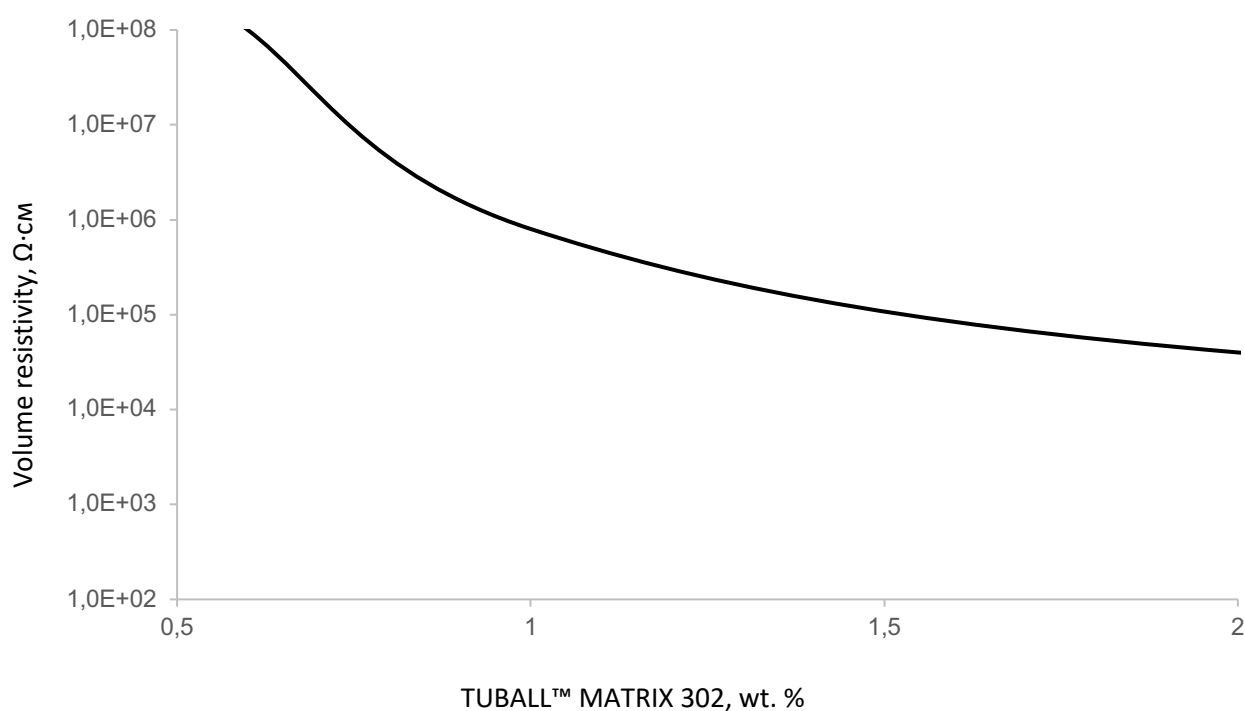

### Dilution

In order to obtain a high-quality TUBALL™ MATRIX dispersion, OCSiAl recommends that close attention be paid to the dilution procedure. Refer to the Processing Guidelines for detailed information.

Stabilizing agent used in TUBALL MATRIX 302 may cause bluish shade of mixture in liquid formulation. This effect is not observed after curing.

### Packaging

OCSiAl provides TUBALL™ MATRIX 302 samples in plastic containers (50 g concentrate).

Industrial volumes are available in different packaging up to 50 kg.

## Storage and transportation

The product is stable in unopened original packaging when stored in a dry, cool and well-ventilated place. Keep the product and any empty containers away from heat and sources of ignition. The recommended storage life is up to 12 months when stored as directed.

## Safety

To ensure safe handling, the appropriate safety regulations should be observed. OCSiAl recommends that every user should be able to apply the safe handling procedures necessary for the user's applications before any handling or manufacturing takes place. A Material Safety Data Sheet outlining the hazards and handling methods for TUBALL™ MATRIX 302 is available.

## Warranties and disclaimer

The Products correspond to the chemical composition indicated in the Technical Data Sheet and the Material Safety Data Sheet supplied with the Product. The information contained in this document (Information) is based on trials carried out by OCSiAl and may contain inaccuracies or errors that could cause injury, loss or damage.

OCSiAl gives no further warranty and makes no further representation regarding the Products and/or the accuracy of Information and/or suggestions for any particular use of the Products or Information, or that suggested use will not infringe any patent. The Products and Information are supplied on an "as is" basis. These express provisions are in place for all warranties, representations, conditions, terms, undertakings and obligations implied by statute, common law, custom, trade usage, course of dealing or otherwise (including implied undertakings of satisfactory quality, conformity with description, fitness for purpose and reasonable skill and care), all of which are hereby excluded to the maximum extent permitted by applicable law.

## Contact information

ASIA		EUROPE	NORTH & SOUTH AMERICA
<p><b>KOREA</b> Office 208, Pilot Plant Bldg., 12, Gaetbeol-ro, Yeonsu-gu, Incheon, 21999, Republic of Korea, +82 32 2600407 asiapacific@ocsial.com</p>	<p><b>CHINA</b> #2004, 20th Floor, Block B, Dachong Business Centre, No. 9678, Shennan Road, Nanshan District, Shenzhen, Guangdong, China +86 135 90125295</p>	<p><b>LUXEMBOURG</b> 1 Rue de la Poudrerie L-3364 Leudelange Grand-Duche de Luxembourg +352 27990373 europe@ocsial.com</p>	<p><b>USA</b> 500 S. Front Str., Suite 860, Columbus, OH 43215, USA +1 415 9065271 usa@ocsial.com</p>
<p><b>HONG KONG</b> Room 1102, 11/F, Lippo Sun Plaza, 28 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong +852 21627385</p>	<p>Room B8, Naked Hub, Building 1, No. 818, Shenchang Road, Minhang District, Shanghai, China  china@ocsial.com</p>	<p><b>ISRAEL</b> Nemo Nano-Materials Ltd. 7th Hatnufa Str. (Kodak building), Petach Tinkva, P.O 3147 4951025, Israel +972 525452481 israel@ocsial.com</p>	
<p><b>JAPAN</b> Kusumoto Chemicals Ltd. Kusumoto Bldg. 1-11-13 Uchikanda Chiyoda-ku, Tokyo, Japan, 1010047 +81 03 32928685 info_tuball@kusumoto.co.jp</p>		<p><b>RUSSIA</b> 29, bld. 2, Kalanchevskaya str., Moscow, 107078 +7 499 653 5152  24, Inzhenernaya str., Novosibirsk 630090, Russia +7 383 201 8387 russia@ocsial.com</p>	